


CP-FUT-6TSRH-100

Cat6, 4 Pair UTP Cable

- Insulation Material HDPE
- Nominal Thickness 0.21mm
- 24 AWG Cable
- 100Mtr. Cable Length

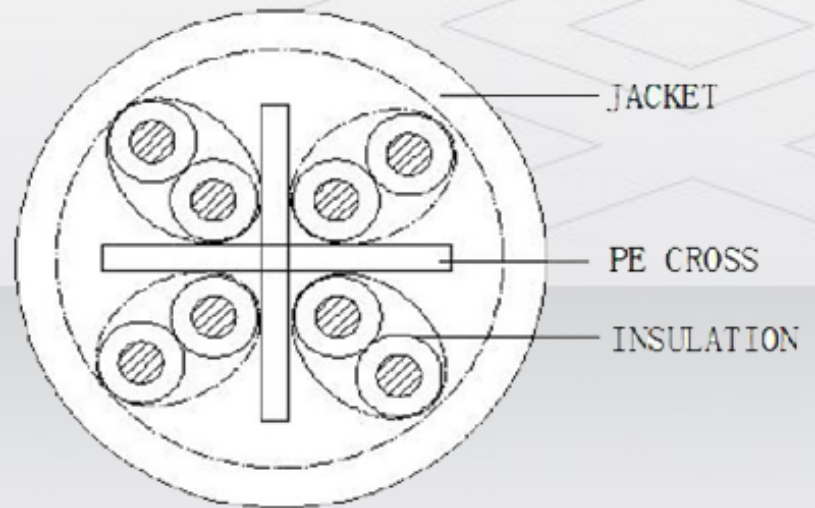


System Overview

For a speedy and easy transmission of data, digital and analog voice and video (RGB) signals on LANs, CP PLUS offers efficiently performing cables that provide an enhanced experience. Designed for applications that are installed in occasional flexing and fixed locations. This cable has been created to strengthen the transmission power of data in your surveillance solution.

Functions

Weather Care

The outer jacket in this cable is made of the most robust PVC to provide a supplemented life potential to the cable and also to safeguard it against the calamities of weather.



CP-FUT-6TSRH-100

Cat6, 4 Pair UTP Cable

Functions

Increased Protection

The superior quality of the insulator used in this cable provides greater prevention against the electromagnetic force emitting from the current.

Heavily Braided with HDPE Insulation

HDPE, or high-density polyethylene, is an excellent material as a direct replacement for distribution insulators of all types. HDPE is much lighter than its porcelain counterparts and almost impervious to the cracking so common to porcelain.


Renewed Capacity

The current carrying capacity of a cable is directly proportionate to its diameter. Keeping that in mind, this cable has been designed to carry a bigger amount of voltage.

About CP PLUS

The brand that is on its way to lead the world when it comes to the security and surveillance industry, CP PLUS, keeps bombarding the market with the most reliable range of products that have been designed carefully and methodically to automate the whole surveillance and security process, no matter how big your premises are.

It was the initiative to help the public in the area where they are the most vulnerable and to empower the sense of safety in our hearts that had conceptualized CP PLUS. And embarking on its mission to make the world a safer and more secure place has taken the brand's journey to unprecedented levels even when compared to international competitors.



CP-FUT-6TSRH-100

Cat6, 4 Pair UTP Cable

Feature	Specification
Constitution	1/0.50±0.02mm (24AWG)
Material	CCA
Insulation No	8C
Conductor Nominal O.D	0.5mm
Insulation Material	HDPE
Insulation Nominal O.D.	0.92±0.05mm
Nom. Thickness	0.21mm
Cabling Filler	The Cross
Cabling Material	Nature PE
Jacket Nominal O.D.	6.0±0.20mm
Jacket Material	PVC
Jacket Nominal	0.50 REF
Color	Gray
Length	100 Mtr.
Insulation Impedance	HDPE-DC 500V 50MΩ.KM. PVC-DC 500V 5MΩ.KM MIN at 20°C
Dielectric Strength	AC-500V/1 SEC Min
Conductor Resistance	24AWG-250Ω/Km Max at 20°C