






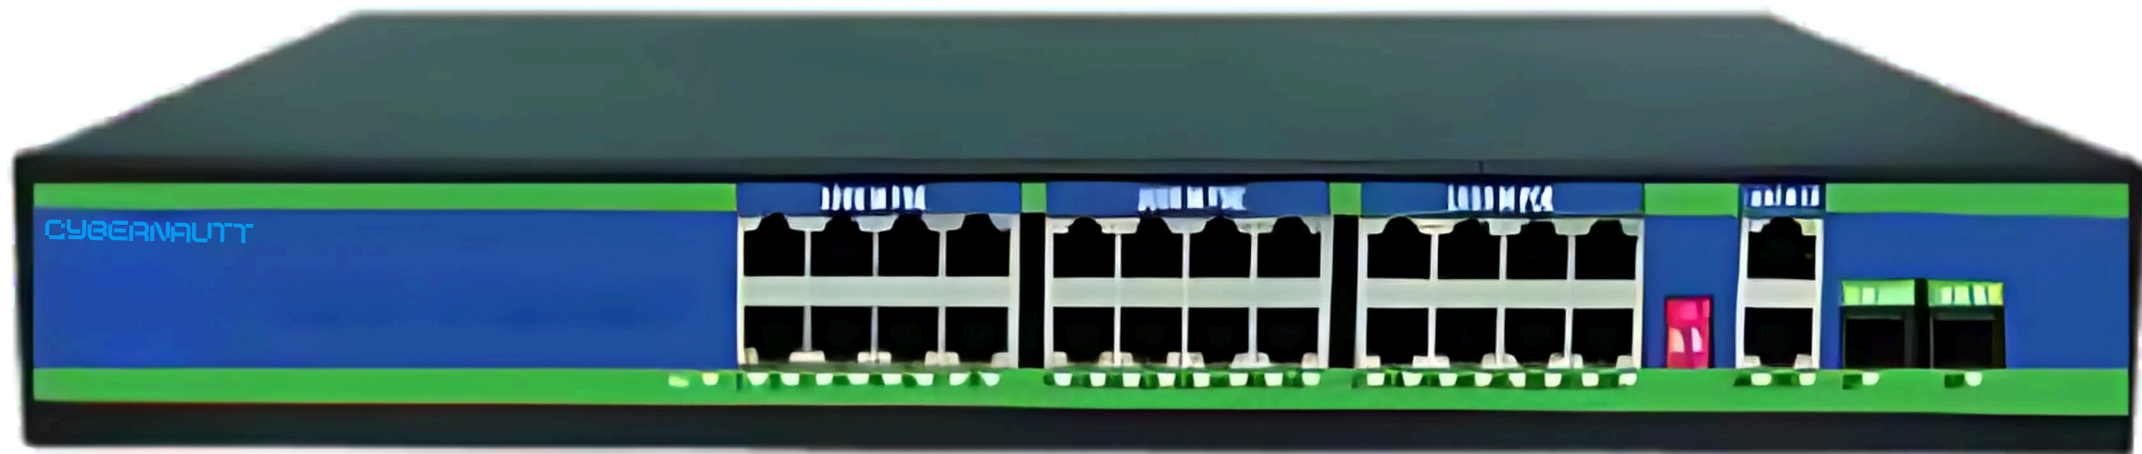




**INDUSTRIAL
GRADE CHIP**

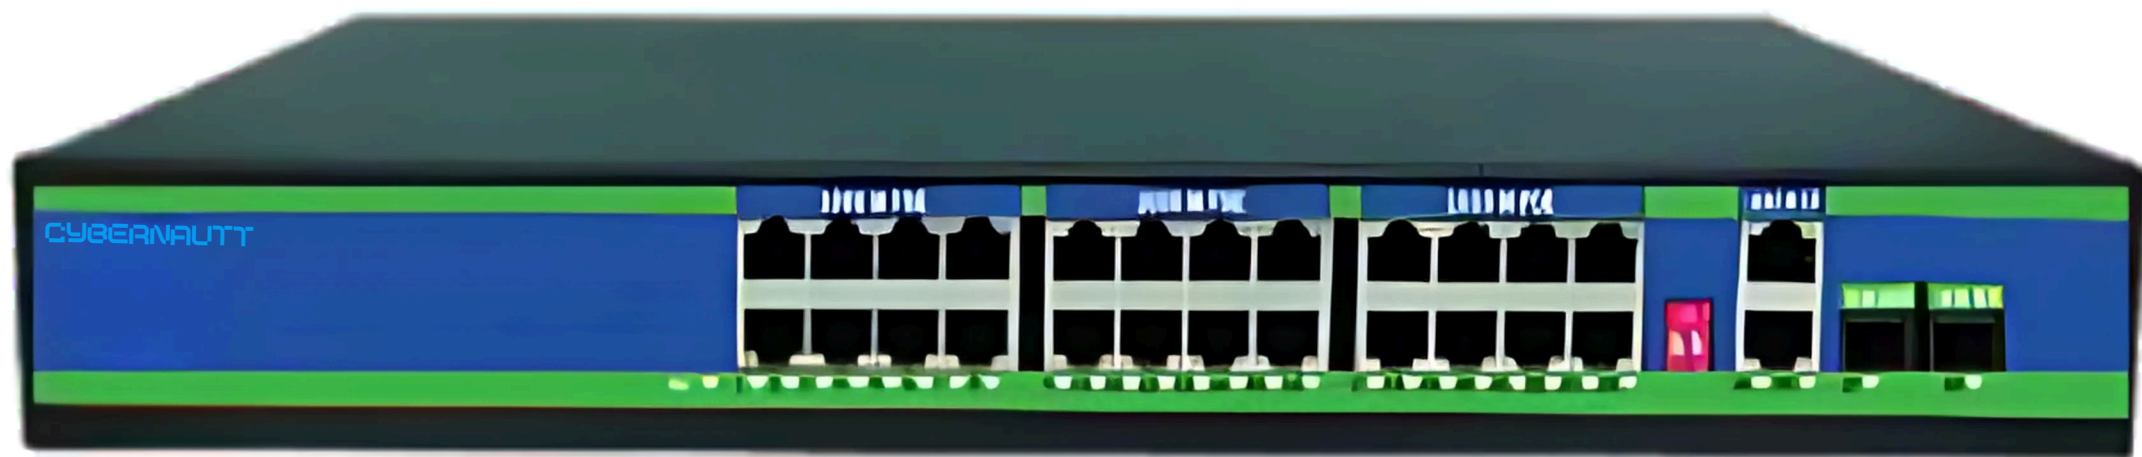

**WORKING
PERFORMANCE**




**8KV ESD
PROTECTION**



**250
MTR.**

CYBERNATTT
CNI-24PG2UG2SG-POE

2 YEARS
WARRANTY

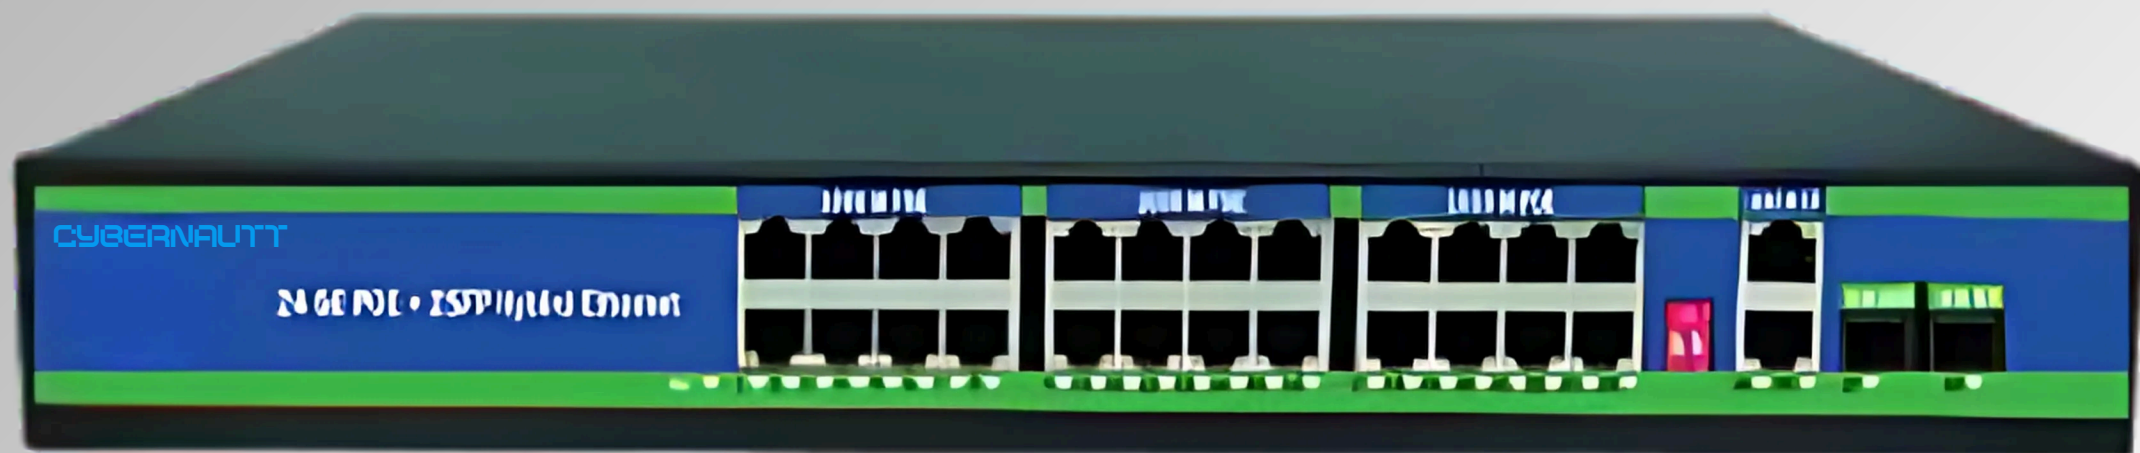


24+2+2 AI FULL GIGA
POE



24*10/100/1000MBPS POE PORTS,
2*10/100/1000MBPS UPLINK PORT,
2*1000MBPS SFP SLOT





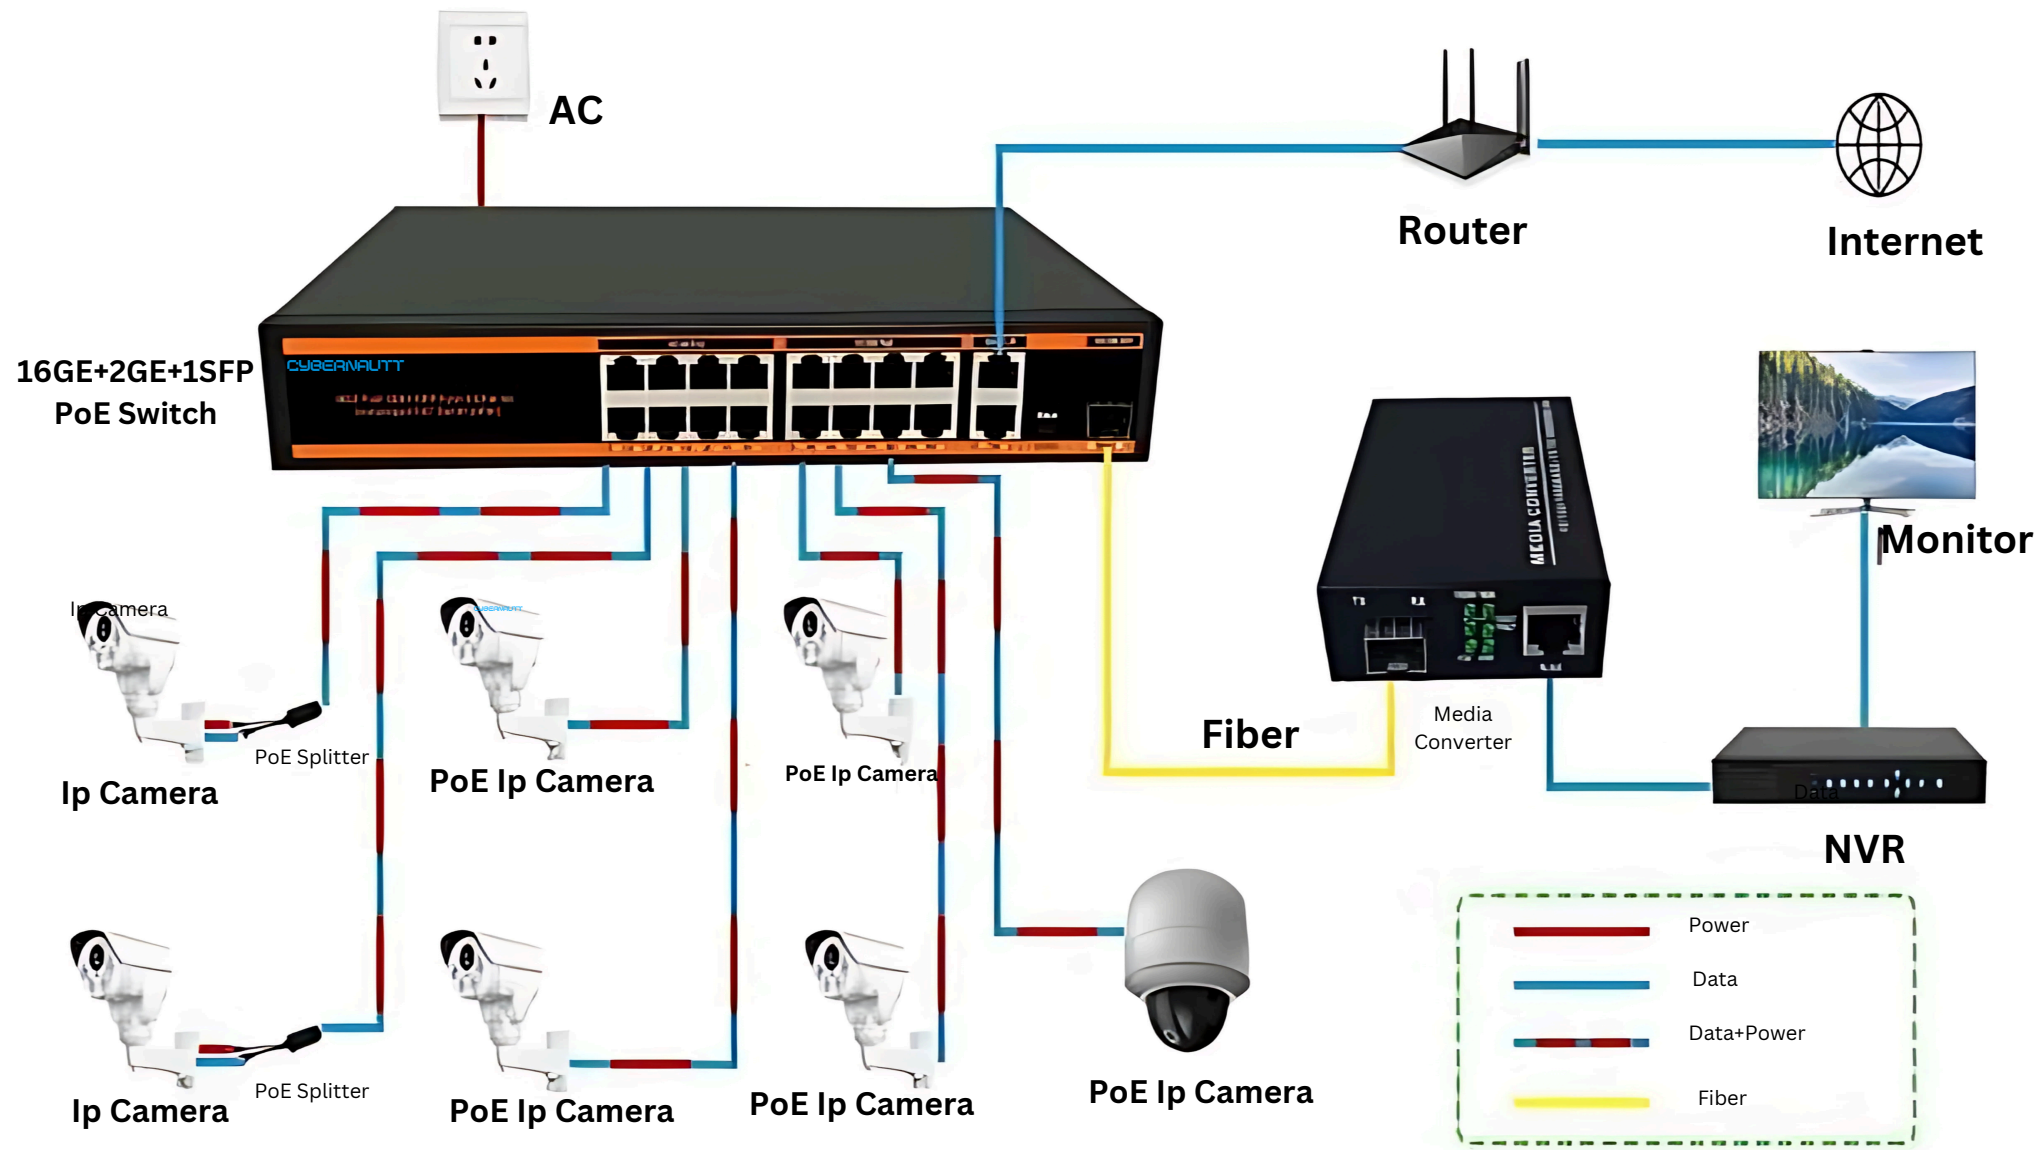

Description

- 24*10/100/1000Mbps PoE ports,
2*10/100/1000Mbps uplink port,
2*1000Mbps SFP Slot
- Support IEEE802.3af/at
- Support Watchdog function
- All port supported by MDI/MDIX auto
flip and self-negotiation
- Built-in power supply
- Maximum power of single PoE port:
30W
- Whole machine power: 300W
- Adopts store-and-forward architecture
- Fanless, natural cooling, small,compact
and quiet design, suitable for desktop or
wall
- Support lightning protection 4KV

Technical Specification

Power	Power Adapter Voltage		AC 110V-240V
	Consumption		300W
Network Connector	Network Port	PoE Ethernet Port	1~24 Port : 10/100/1000Mbps
		Ethernet port	Uplink Port : 2*10/100/1000Mbps
		SFP Port	SFP Port: 2*1000Mbps
	Transmission Distance		1~24 Port : 100/1000Mbps:0~100m;
			Uplink Port : 0 ~ 100m
			SFP: depends on the optical module(20km...100km)
Network Switch	Transmission Medium		Cat5/5e/6 standard network cable
	Network Standard		IEEE802.3/802.3u, IEEE802.3x,IEEE802.ab
	Switching Capacity		56Gbps
	Packet buffer memory		1Mbits
	Throughput		41.664Mpps
	MAC Table		2K
Power Over Ethernet	Paket Forwarding Rate		10Mbps:14880pps/port 100Mbps:148800pps/port 1000Mbps:1488000pps/port
	PoE Standard		IEEE 802.3af/at
	PoE Power Supply		12 45 + ,36 78- , 8 core power supply
	PoE Power		af=15.4W,at=30W

RJ45 port	Port Function	Power priority mechanism, fast and forward, MAC automatic learning and aging IEEE802.3X Full-duplex and mode and backpressure for Half-duplex mode
LED Indicator	LED Indicator	LINK/ACT.100Mbps;PoE Status Indicator; Power indicator;Extender
Environmental	Working temperature	0°C~55°C
	Relative Humid	20~95%
	Storage temperature	-20°C~70°C
Mechanical	Dimension (L×W×H)	440mm*192mm*45mm
	Color	Black
	Weight	0.6kg