

Product Highlights

Rugged Construction

IP66 weatherproof housing makes DCS-F4722E ideal for surveillance applications

Full HD Resolution with Wide Dynamic Range

A high-resolution megapixel sensor provides 1080p resolution while Wide Dynamic Range technology ensures that you capture the details you need

Complete Day/Night Surveillance Solution

Keep watch over an area 24 hours a day with built-in night vision; the IR LEDs and automatic IR cut filter gives you a clear picture, even in complete darkness



DCS-F4722E

2 MP Full HD Day & Night Varifocal Enhanced Outdoor Bullet Network Camera

Features

Exceptional Video Quality

- 1 /2.8" 2 Megapixel Progressive Scan CMOS sensor
- Maximum resolution of 1920x1080
- Wide Dynamic Range image enhancement
- H.264/H.265 MJPEG codec support for streaming and recording
- Motion detection
- Privacy mask
- 3D filtering reduces noise in low-light environments

D-Link DCS-F4722E Vigilance Full HD Outdoor Varifocal Bullet Network Camera is a high definition professional surveillance and security solution suitable for small, medium, and large enterprises. The camera uses a high-sensitivity 1 /2.8" 2megapixel progressive scan CMOS sensor with onboard WDR image enhancement to deliver truly superior quality video in all conditions. The all-in-one rugged design makes this camera extremely reliable and ideal for deployment in surveillance applications.

Multiple Video Streaming & Recording

DCS-F4722E supports simultaneous streaming of H.264/H.265 and MJPEG video to provide both high quality and bandwidth-efficient compression formats. First & Second video streams are user configurable for high quality and optimized bandwidth recording while Third predefined low bandwidth stream is suitable for remote monitoring.

Continuous Monitoring

DCS-F4722E WDR image enhancement gives you improved image quality in environments with uneven or difficult lighting, so you can identify subjects that are backlit or in brightly lit areas. In low-light situations, the IR cut filter automatically slides out of the way to use all available light. The DCS-F4722E also has built-in IR LED illuminators with a up to 40 meter range, allowing the camera to keep watch even in complete darkness. These features work together to give you a reliable surveillance camera capable of monitoring an area 24 hours a day.

H.265 High Efficiency Video Coding

H.265 is a new video coding standard that enables video to be compressed to a file that is about half the size (or half the bit rate) of H.264. This is results into lower bandwidth utilization and better visual quality.

Outdoor Placement

- Built-in IR LED illuminator with a up to 40m range for use in dark areas
- Range of mounting options for flexible placement
- Rugged IP66 weatherproof housing
- IK-10 Vandal proof

Network

- 10/100 Fast Ethernet port
- Power over Ethernet (PoE) ensures easy and flexible integration into your network

Image Enhancement

DCS-F4722E WDR image enhancement gives you improved image quality in environments with varied light conditions, so you can identify subjects that are backlit or in brightly lit areas.

The HLC feature allows camera to provide clear images during night vision by adjusting the brightness from strong light sources like head lights & spot lights.

2D and 3D Digital Noise Reduction technology provides clearer images during low light condition by processing the signal and reducing the noise.

Corridor Mode:

DCS-F4722E supports Corridor Mode. After enabling this mode, aspect ratio will be changed to 9:16. This feature is very helpful to deploy camera for monitoring narrow areas like tunnel, Passages or Corridors.

Region of Interest (ROI):

ROI allows you to configure the area of interest to be captured and recorded with higher resolution and rest of the area will be captured with lower resolution. This will help to optimize the required network bandwidth and save storage.

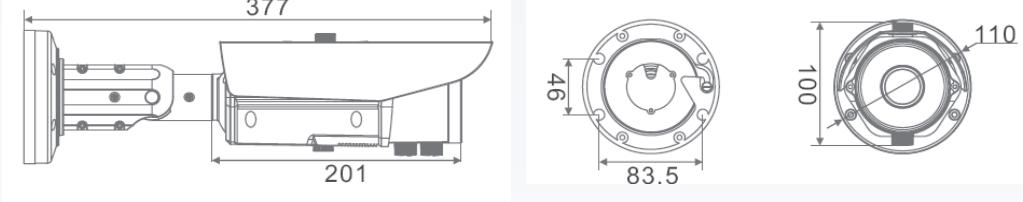
Technical Specifications

Camera Specification

Camera Hardware Profile	<ul style="list-style-type: none"> • 1 /2.8" 2 MP Progressive Scan CMOS • Up to 40 meter IR illumination distance • Built-in Infrared-Cut Removable (ICR) Filter module, Smart IR support • Minimum illumination: Color 0.01Lux; IR ON 0 Lux • Shutter Speed: 1/5-1/20000 • Digital zoom : 10x 	<ul style="list-style-type: none"> • Focal Length: motorized varifocal lens 2.7-12mm • Aperture : F2.2 • Angle of view <ul style="list-style-type: none"> • (H) 95° ~ 35° • (V) 48° ~ 20° • Minimum object distance : 0.3m
Camera Housing	<ul style="list-style-type: none"> • IP66 compliant weatherproof housing 	
Image Features	<ul style="list-style-type: none"> • Configurable image size, quality, frame rate, VBR/CBR (500kbps ~ 12 Mbps) • Time stamp and text overlays • Customized text overlay • Digital Noise reduction with 2D and 3D technology • No. of zones configurable for ROI : 8 	<ul style="list-style-type: none"> • Configurable privacy mask zones : Total zones 4 • Configurable Exposure, Brightness, Saturation, Contrast, Sharpness, White Balance, Rotate mode, Corridor mode • Image Enhancement with WDR, HLC
Video Compression	<ul style="list-style-type: none"> • Simultaneous H.264/H.265 (BP/MP/HP)/MJPEG format compression • H.264/H.265, MJPEG 	<ul style="list-style-type: none"> • JPEG for still images
Video Resolution	<ul style="list-style-type: none"> • Main Stream: 1920x1080/1280x960/1280x720 • Second Stream: D1 to QVGA 	
Frame Rate	<ul style="list-style-type: none"> • Selectable upto 30 FPS 	
Vandal Proof (IK-10)	<ul style="list-style-type: none"> • Yes 	
External Device Interfaces	<ul style="list-style-type: none"> • 10/100 BASE-TX Ethernet port with PoE • 1ch Audio In & 1ch Audio Out • 1ch Alarm In&1ch Alarm Out • BNC Output • Micro SD/ SDHC/ SDXC slot, Max 128GB • RS-485 	

Network

Network Protocols	<ul style="list-style-type: none"> • IPv6 • IPv4 • TCP/IP • UDP • ICMP • DHCP client • NTP client • DNS client 	<ul style="list-style-type: none"> • SMTP client • HTTP/HTTPS • PPPoE • UPnP • RTP/RTSP • Multicast • ONVIF compliant • DDNS client
Security	<ul style="list-style-type: none"> • Administrator and user group protection • Remote client access control 	<ul style="list-style-type: none"> • HTTP and RTSP authentication • HTTPS encryption for web access hardware watchdog

System Management	
System Requirements for Web Interface	<ul style="list-style-type: none"> IE 11, Chrome, Firefox
Event Management	<ul style="list-style-type: none"> Motion detection, Video Loss, Port Alarm Alerts to SMTP client
	<ul style="list-style-type: none"> Event notification and uploading of snapshots via e-mail Multiple event notifications only on mails
Remote Management	<ul style="list-style-type: none"> Configuration interface accessible via web browser Take snapshots
OS and Mobile Support	<ul style="list-style-type: none"> Windows 7/8/XP/Vista/2000 and higher Android
DCMS System Requirement	<ul style="list-style-type: none"> Operating System: 32 Bits - MS Windows XP pro SP3/Vista SPI/Win 7 SPI/ Win10 64 bits - Win 7 SPI/Win Server 2008 R2
DCMS Software Function	<ul style="list-style-type: none"> Control and manage up to 64 channels
General	
Weight	<ul style="list-style-type: none"> 1680g
Power	<ul style="list-style-type: none"> DC 12V & PoE (802.3af)
Power Consumption	<ul style="list-style-type: none"> 5W (IR LED OFF); 8W (IR LED ON)
Temperature	<ul style="list-style-type: none"> Operating: -40°C ~ 60°C
Humidity	<ul style="list-style-type: none"> Operating: 0% ~ 90% RH
Certification	<ul style="list-style-type: none"> CE & FCC
Dimension	<ul style="list-style-type: none"> 110 x 377mm
	
Order Information	
Part Number	Description
DCS-F4722E	2 MP Full HD Day & Night Varifocal Enhanced Outdoor Bullet Network Camera
Optional Accessory	
Part Number	Description
DCS-FCA633	 Junction Box
DCS-FCA623	 Pendant Mount
DCS-FCA624	 Wall Mount
DCS-FCA633B	 Junction Box