



MW560N | WXGA Meeting Room Projector



Crystal Clear Presentation to Win the Day



4500 ANSI Lumens



Resolution



Contrast Ratio



Lamp Life up to 15,000 hrs



SmartEco™ mode



10W Speaker



Easy Lamp Changes



Get Instant On/Off



2D Keystone




Dual HDMI

Category	Spec Attribute	MW560N
Display	Projection System	DLP Single 0.65" WXGA
	DMD type	0.65" WXGA
	Native Resolution	1280 x 800 pixels
	Brightness	4500 ANSI Lumens
	Contrast Ratio*	25000:1
	Display Color	30 Bits (1.07 billion colors)
	Aspect Ratio	Native 16:09 (5 aspect ratio selectable)
	Light Source	Lamp
Optical	Light Source life*	Normal 6000 hrs, b. ECO 10000 hrs, c. SmartEco 10000 hrs, d. LampSave 15000 hrs
	Throw Ratio	1.55-1.7
	Zoom Ratio	1.1x
	Keystone Correction	Auto ID, Vertical +/- 40 degrees
Audio	Projection Offset	100%
	Projection Size	60"-150"
Special Feature	Speaker	10W x1
	Security	Security Bar,Kingsington lock
Compatibility	Feature	1D Auto Keystone, High Brightness, Spreadsheet mode, Bright Mode, Presentation Mode, Infographic Mode, Video Mode, Srgb Mode
	Resolution Support	VGA(640 x 480) to WUXGA_RB(1920 x 1200)
	Horizontal Frequency	15K~102KHz
	Vertical Scan Rate	23~120Hz
	HDTV Compatibility	480i, 480p, 576i, 576p, 720p, 1080i, 1080p
Power	Video Compatibility	"NTSC, PAL, SECAM, SDTV (480i/576i), EDTV (480p/576p, HDTV (720p, 1080i/p 60Hz)"
	Power Consumptions(Max/Normal/Eco)	Max 280W, Normal 260W, Eco 215W
	Standby Power Consumption	Normal < 0.5Watts
Dimension and Weight	Power Supply	AC 100 to 240 V, 50/60 Hz
	Product Dimensions (WxHxD)	296x221x120mm
Operation Condition	Product Weight	2.3 kg
	Noise Level (Normal/Eco)	34/29dBA
	Operating Temperature	0 ~ 40°C
Accessories	Accessories (Standard)	QSG(4J.JND01.001) Remote Control (5J.JND06.001) AAA Batteryx2 VGA cable (1.5m) Power Cord (1.8m) Warranty card (by Region)
	Accessories (Optional)	Spare Lamp Kit (5J.JND05.001) 3D Glasses (5J.J9H25.002) Ceiling mount Qcast Mirror(5A.JH328.10X) WDC10 WDC20
OSD	On Screen Display Language	Arabic/Bulgarian/ Croatian/ Czech/ Danish/ Dutch/ English/ Finnish/ French/ German/ Greek/ Hindi/ Hungarian/ Italian/ Indonesian/ Japanese/ Korean/ Norwegian/ Polish/ Portuguese/ Romanian/ Russian/ Simplified Chinese/ Spanish/ Swedish/ Turkish/ Thai/ Traditional Chinese/ Farsi / Vietnamese/ (30 Languages)
Environment Notice	*The Contrast is measure by Full On Full Off standard.	
	*LightSource life results will vary depending on environmental conditions and usage. Actual product's features and specifications are subject to change without notice.	


Installation

Ceiling/Wall mount installation diagram

Ceiling/Wall mount screw: M4
(Max L = 25 mm; Min L = 20 mm)

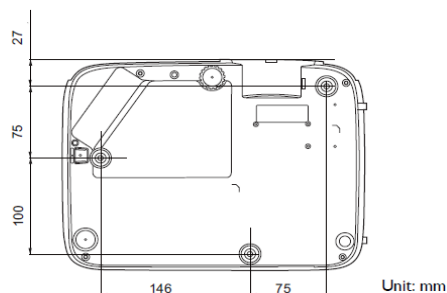

Connectivity

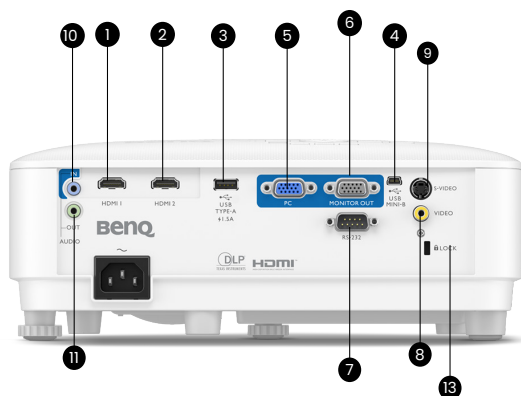


Input and Output Terminals

1	HDMI-1	x1
2	HDMI-2	x1
3	USB TypeA (1.5A power)	x1
4	USB Type min B (For FW upgrade)	x1
5	Computer In (D-sub 15pin, Female)	x1
6	Monitor out (D-sub 15pin, Female)	x1
7	RS232 In (D-sub 9pin, male)	x1
8	Composite Video (RCA)	x1
9	S-Video	x1
10	Audio in (mini jack)	x1
11	Audio out (mini jack)	x1
12	IR Receiver (Front+Top)	x2
13	Kensington anti-theft lock slot	x1

Dimension

296 mm(W) x 221 mm(H) x 120 mm(D)

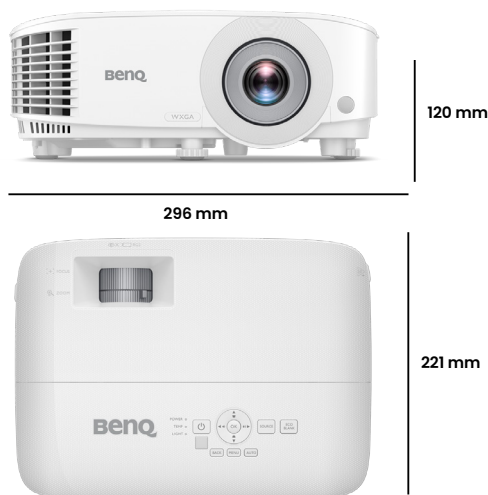

Corporate Office: BenQ India Pvt. Ltd.

9B Building, 11th Floor, DLF Cyber City, DLF Phase III, Gurgaon Haryana, India - 122002,
Tel: +91 124-4501400, Fax: +91 124-4501400
www.BenQ.in, Customer Care No. 1800-419-9979, E-mail: Sales.EnquiryIn@BenQ.com

*To optimize your projection quality, we suggest to do the projection within non-gray area.



2 Years Onsite Warranty for Projector.
Lamp Light Source Warranty of 1 years or 1,000 Hrs whichever is earlier

www.BenQ.in

Like BenQ India on



Dealer's Stamp

BenQ