


8 Port POE Switch with 2 Gigabit Uplink Port

ESCN08POE2UG

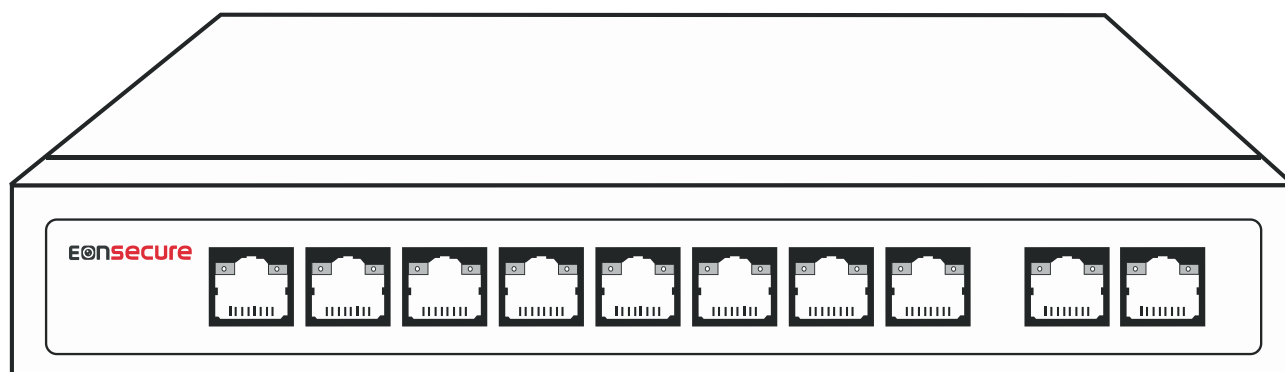

8 Port POE Switch with 2 Gigabit Uplink Port

ESCN08POE2UG

Technical Specifications

Feature	Specifications
Product Code	ESCN08POE2UG
Power Supply	Power Adaptor, 52V/2.3A
PoE Port	8×10/100 Mbps
Uplink Port	2×10/100/1000 Mbps
Network Standard	IEEE802.3, IEEE802.3u, IEEE802.3X
PoE Standard	IEEE802.3af/at
Backplane Bandwidth	5.6Gbps
Forwarding Capacity	4.16Mpps
Packet Buffer	1792K
MAC Address List	4K
Forward Mode	Store-and- forward
	Default: All port can be communicated freely,link speed is 10/100Mbps
Mode Switch	Extend: Port 1-8, Speed 10Mbps, Maximum transmission distance up to 250 meters; Port 1-8 are isolated respectively, but can communicate with Port 9-10
PoE Power Mode	End-span 1/2(+),3/6(-)
PoE Power Budget	Each port ≤30W Whole device≤130W
	Surge Protection: 4KV (common mode),10/700us IEC61000-4-5
Protection	ESD Protection: Contact Discharge: ±4KV
	Air Discharge: ±6KV Standard: IEC61000-4-2
Operating Temperature	-20~55°C 5%-95% (non-condensing)
Storage Temperature	-40~75°C 5%-95% (non-condensing)
Mean time between failures (MTBF)	>50000h