

# Product datasheet

Specifications



## Complete potentiometer, plastic, Ø22, 1K

XB5AD912R1K

### Main

Range Of Product	Harmony XB5
Product Or Component Type	Potentiometer
Device Short Name	XB5
Head Type	Standard
Device Presentation	Complete product

### Complementary

Bezel Material	Dark grey plastic
Mounting Diamete	22 mm
Product Compatibility	Ø 6 mm shaft
Sale Per Indivisible Quantity	1
Cad Overall Width	30 mm
Cad Overall Height	42 mm
Cad Overall Depth	82 mm
Net Weight	0.048 kg
Protective Treatment	TH
Ambient Air Temperature For Storage	-40...70 °C
Ambient Air Temperature For Operation	-40...70 °C
Electrical Shock Protection Class	Class II conforming to IEC 60536
Ip Degree Of Protection	IP66 conforming to IEC 60529
Nema Degree Of Protection	NEMA 13 NEMA 4X
Resistance To High Pressure Washer	7000000 Pa at 55 °C, distance : 0.1 m
Ik Degree Of Protection	IK03 conforming to IEC 50102
Standards	UL 508 CSA C22.2 No 14 EN/IEC 60947-1
Product Certifications	BV UL listed CSA
Shape Of Signaling Unit Head	Round
Operator Profile	knurled knob, with (white)
[Us] Rated Supply Voltage	<= 30 V AC <= 42 V DC

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

<b>Rated Power In W</b>	1 W at 70 °C
<b>Precision Of Internal Conversion Resistor</b>	+/-10%
<b>Potentiometer Characteristic</b>	Linear
<b>Mechanical Durability</b>	50000 cycles
<b>Ohmic Value</b>	1000 Ohm
<b>Material</b>	Cermet
<b>Vibration Resistance</b>	5 gn (f= 2...500 Hz) conforming to IEC 60068-2-6
<b>Shock Resistance</b>	30 gn (duration = 18 ms) for half sine wave acceleration conforming to IEC 60068-2-27 50 gn (duration = 11 ms) for half sine wave acceleration conforming to IEC 60068-2-27
<b>Main Group</b>	Potentiometer
<b>Group Of Product</b>	Potentiometer knurled knob
<b>Colour Of Marking</b>	White

## Packing Units

<b>Unit Type Of Package 1</b>	PCE
<b>Number Of Units In Package 1</b>	1
<b>Package 1 Height</b>	4.2 cm
<b>Package 1 Width</b>	5.0 cm
<b>Package 1 Length</b>	8.4 cm
<b>Package 1 Weight</b>	58.0 g
<b>Unit Type Of Package 2</b>	S02
<b>Number Of Units In Package 2</b>	40
<b>Package 2 Height</b>	15.0 cm
<b>Package 2 Width</b>	30.0 cm
<b>Package 2 Length</b>	40.0 cm
<b>Package 2 Weight</b>	2.686 kg

## Sustainability

**Green Premium™ label** is Schneider Electric's commitment to delivering products with best-in-class environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO<sub>2</sub> products.

**Guide to assessing product sustainability** is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

[Learn more about Green Premium >](#)

[Guide to assess a product's sustainability >](#)

## Well-being performance

 Reach Free Of Svhc

 Mercury Free

 Rohs Exemption Information Yes

**Reach Regulation** [REACH Declaration](#)

**Eu Rohs Directive** [Pro-active compliance \(Product out of EU RoHS legal scope\)](#)


[EU RoHS Declaration](#)

**China Rohs Regulation** [China RoHS declaration](#)

**Weee** The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins

## Dimensions Drawings


## Dimensions

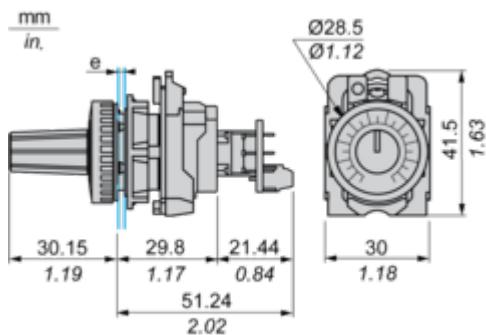


## Mounting and Clearance

## Panel Cut-out for Pushbuttons, Switches and Pilot Lights (Finished Holes, Ready for Installation)

## Connection by Screw Terminals or Plug-in Connectors

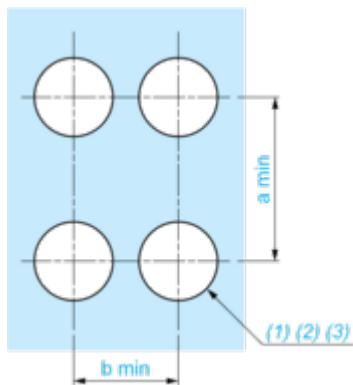


## Connection by Faston Connectors

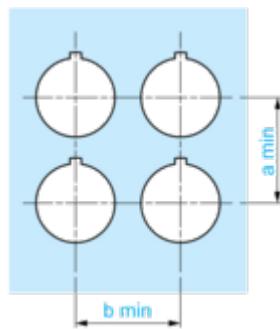

Connections	a in mm	a in in.	b in mm	b in in.
By screw clamp terminals or plug-in connector	40	1.57	30	1.18
By Faston connectors	45	1.77	32	1.26

## Detail of Lug Recess

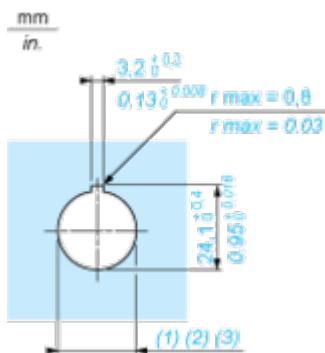

(1) Diameter on finished panel or support

(2) For selector switches and Emergency stop buttons, use of an anti-rotation plate type ZB5AZ902 is recommended.

(3) Ø22.5 mm recommended ( $\varnothing 22.3^{+0.4}_0$ ) / Ø0.89 in. recommended ( $\varnothing 0.88^{+0.016}_0$ )

